



# DUROWIPER CLASS 50

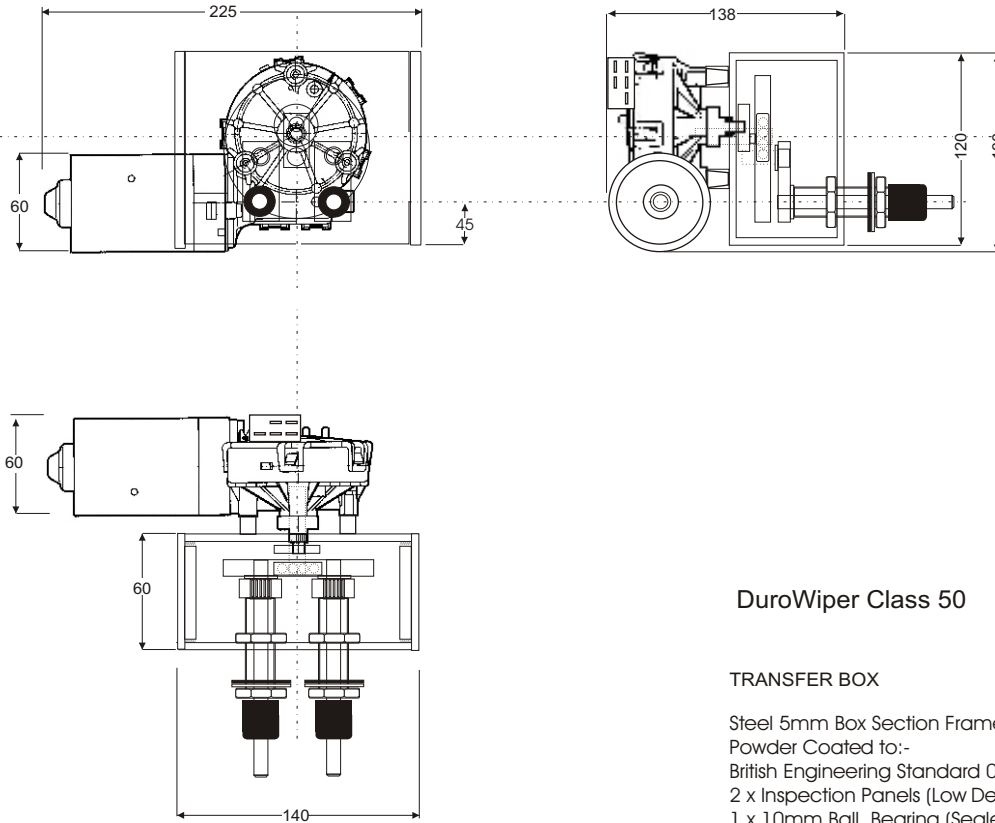

- 53B- Fast = 2
- 53 - Slow = 1
- 31 - Negative = Green & Yellow
- 53A- Positive = 3
- 31B- Park Return = 4

## DuroWiper Class 50

### TRANSFER BOX

- Steel 5mm Box Section Frame
- Powder Coated to:-
- British Engineering Standard 005 Section 22.
- 2 x Inspection Panels (Low Density Polyethylene).
- 1 x 10mm Ball Bearing (Sealed)
- 2 x 10mm Needle Bearings.
- 8 x Oilite Bushes.
- 4 x G Seal Seals (Water Proof Seals).
- 2 x External Seals

- Bosch 24 or 12 Volt DC Isolated Earth.
- 3 Amps Starting
- 1.5 Amps Running.
- Twin Parallel Drive Shafts 12 mm Diameter 316 Stainless Steel
- Distance between shafts to 50mm.
- Threaded Spindles M20 x 1 mm Pitch Length dependant on Bulkhead thickness and any interfering protrusion.
- Weight :- 3.74 Kilos



**DuroWipers** Unit 20, Oldends Lane Ind.Est., Stonehouse, Gloucestershire, G10 3RQ  
 Tel: +44(0)844 8541 551- Fax:+44(0)844 8541 550 - sales@durowipers.co.uk - www.durowipers.co.uk

### DuroWipers Wiper Manufacturers

This plan and design remain the property of DuroWipers and is loaned on condition that it will not be used against their interest nor reproduced in whole or in part without permission and that it shall be returned if requested.

<b>Drawing Number</b> 30625	Tolerances ±	Material	Quantity
Date 23-03-2010	Drawn by TB		
Project Class 50 24VDC	Customer		